



18, rue Fontenoy F - 54000 NANCY
0033 3 83 32 43 77 / www.osmosiscie.com

TECHNICAL DRIVE *TRANSIT*




Technical Contact : Jean Muck 0033.6.13.07.25.43 - jean@osmosiscie.com

**TECHNICAL DRIVE TRUCK TOWS 120 m³ / TRANSIT
OSMOSIS CIE 2005**

registration carrier: 5081 ZP 54
 registration tows: 886 ZS 54
 insurance : MAIF n° carte F567 / n° police 2076010 P


technical contact : jean muck 00.33.6.13.07.25.43 - jean@osmosiscie.com

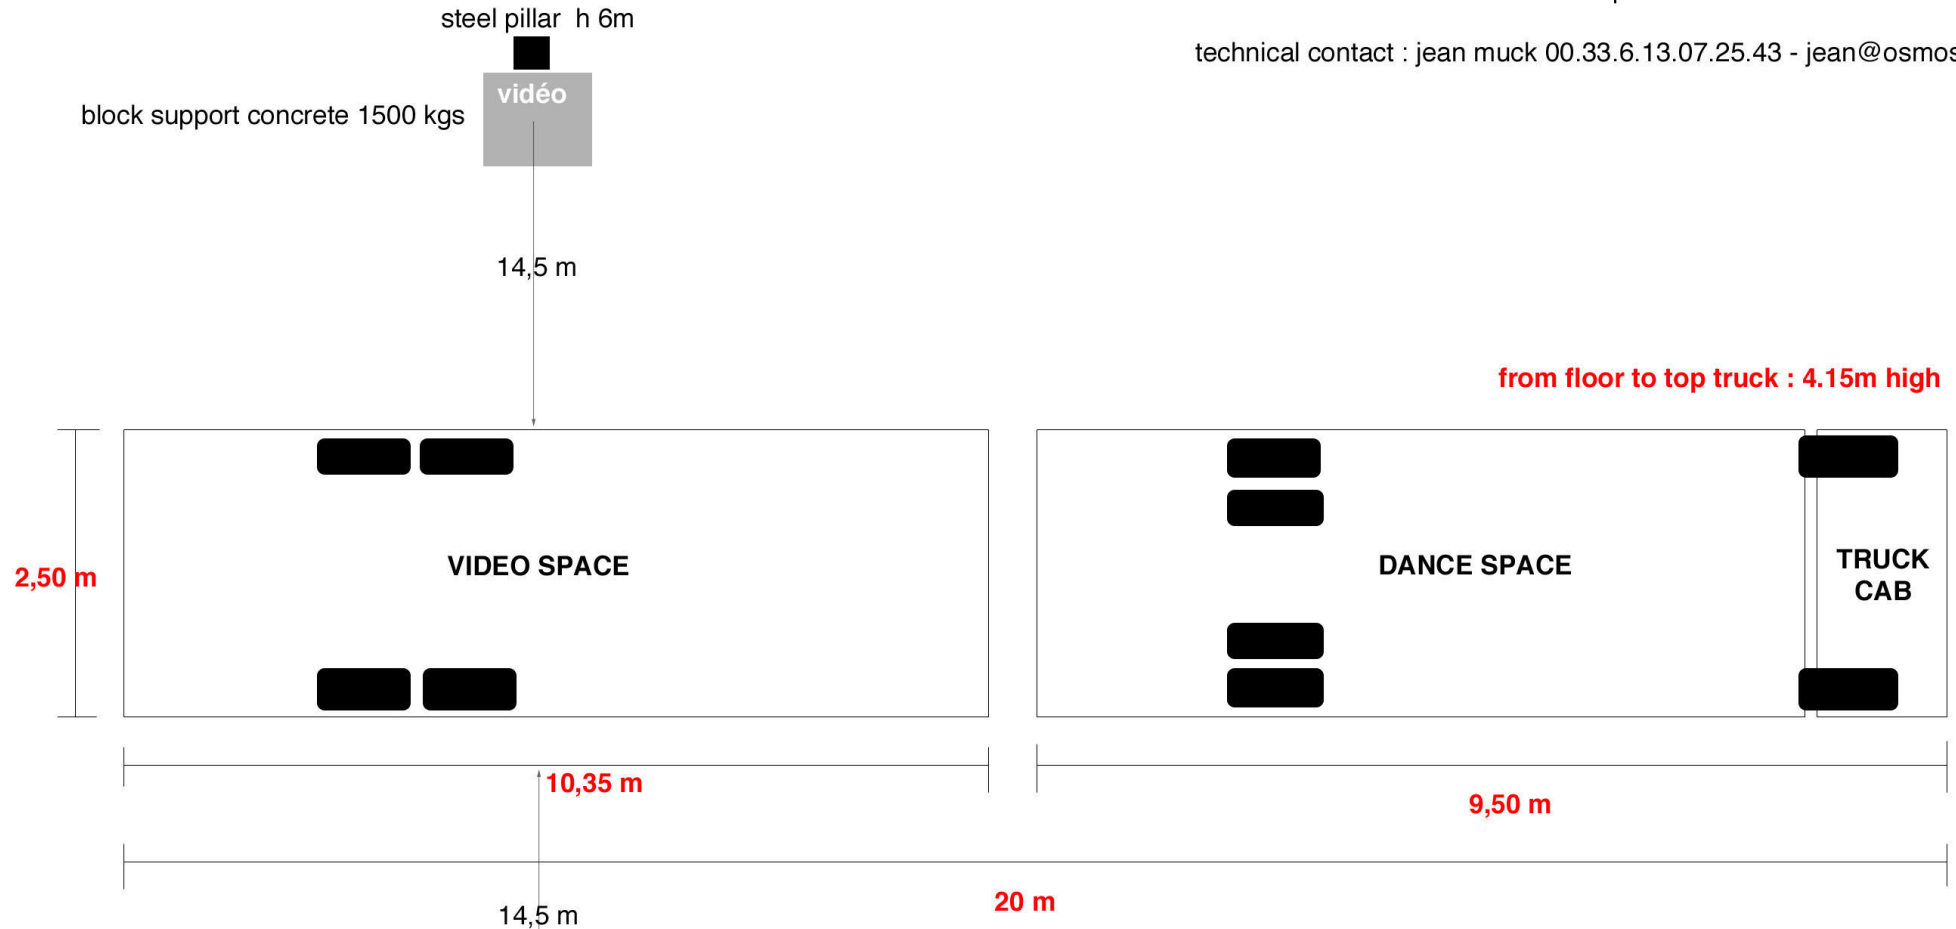

Height of the unit: 415 cm
Tare weight of the carrier: 8400 kgs
Tare weight under the front axle: 4100 kgs - Tare weight under the rear axle : 4300 kgs
Tare weight of the trailer: 4500 kgs
Weight of the material of the company in the carrier: 3500 kgs
Weight of the material of the company in the trailer: 1000 kgs
Gross weight: 17400 kgs

Plan of establishment light - TRANSIT - Osmosis Cie

Technical Contact : Jean Muckensturm - 0033 6 13 07 25 43 - jean@osmosiscie.com

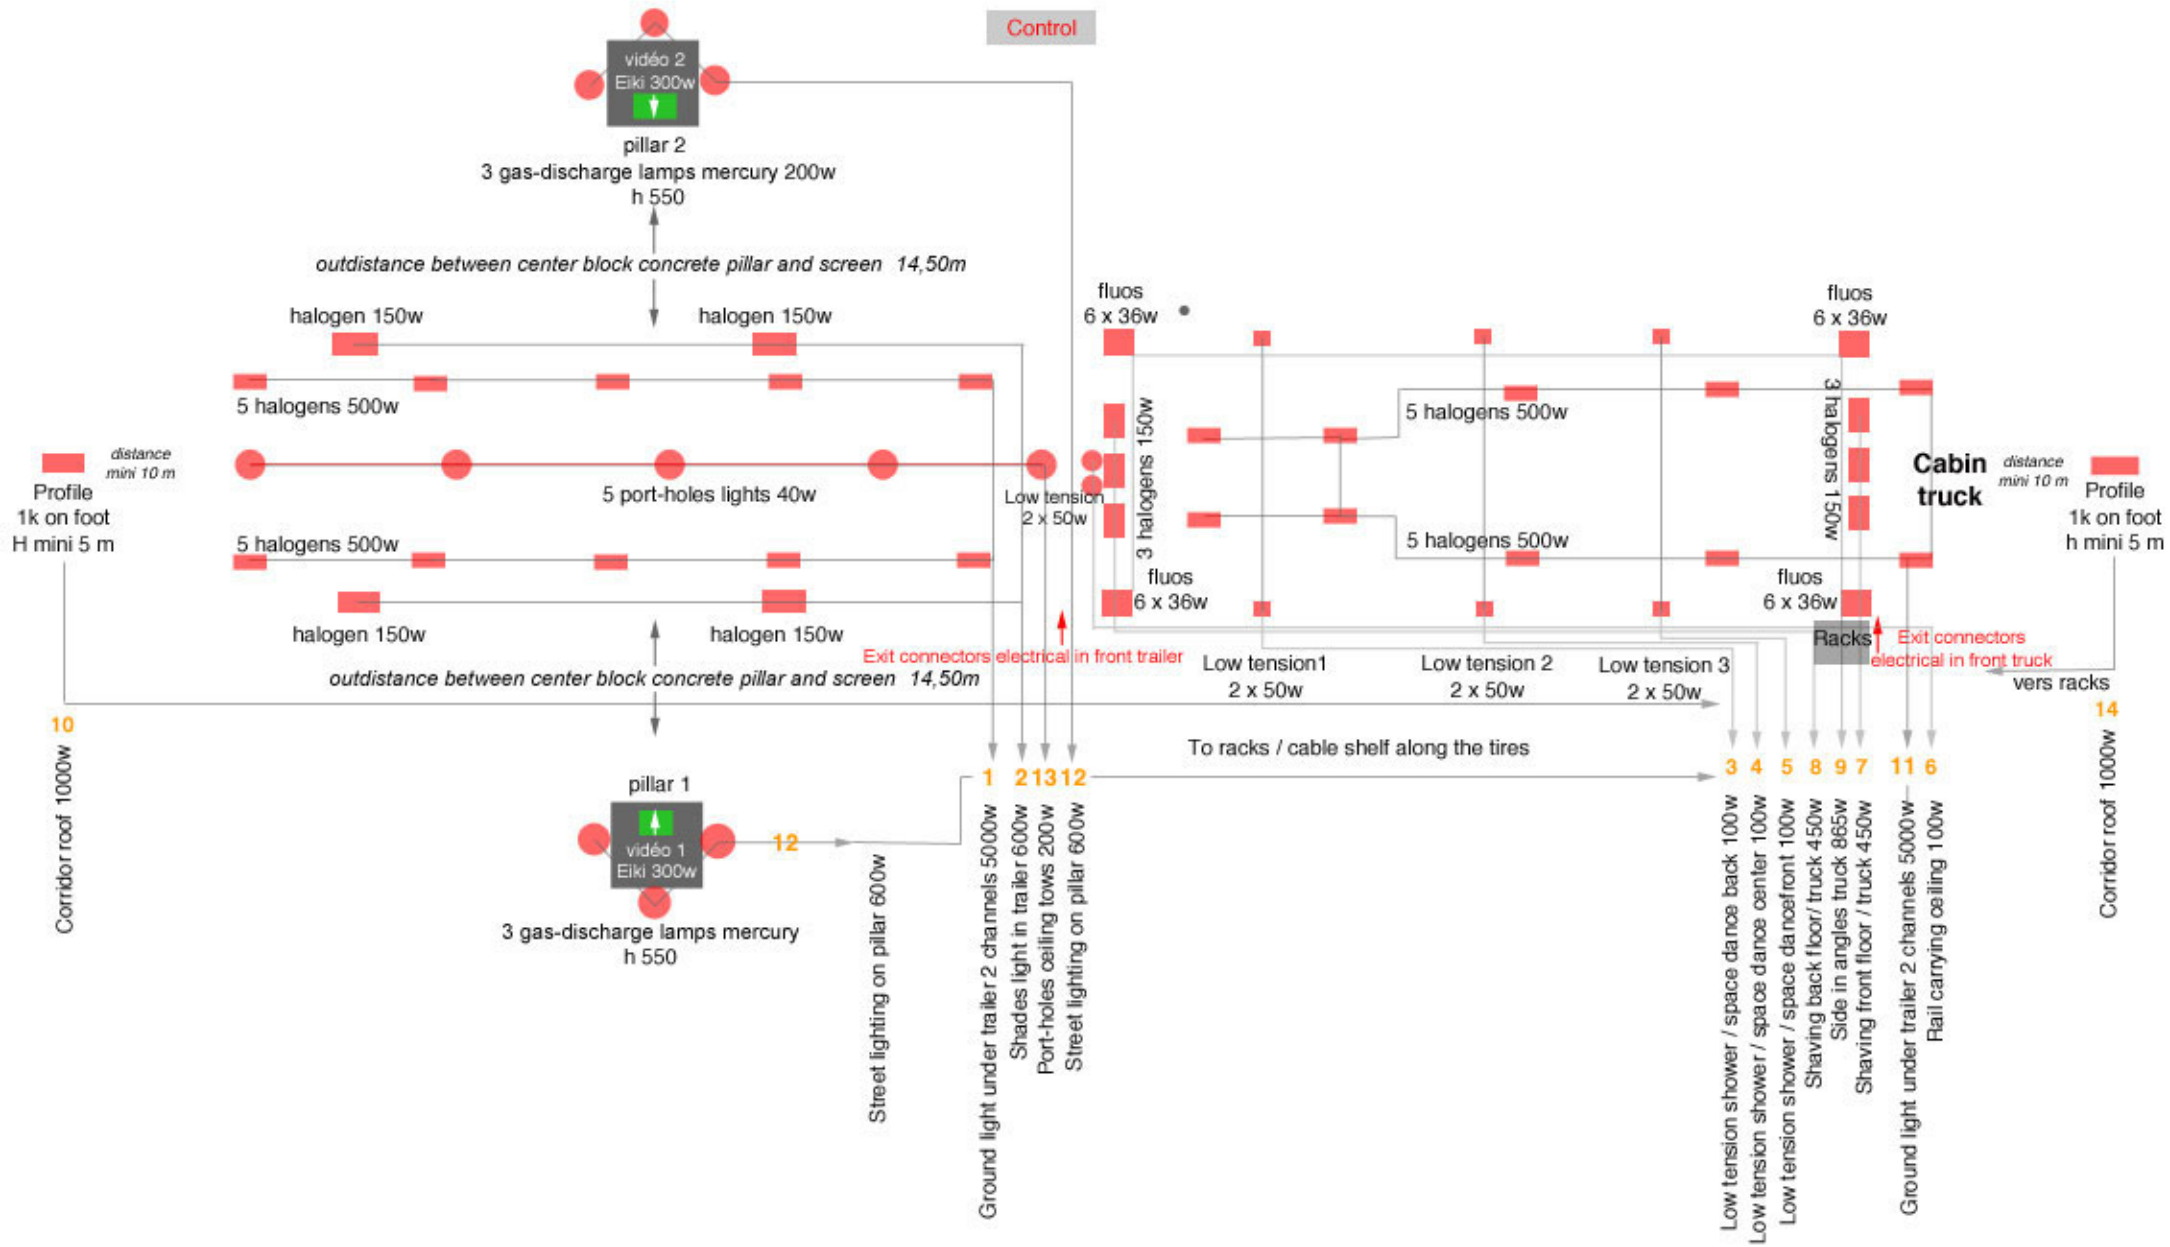

Plan of establishment sound - TRANSIT - Osmosis Cie


Technical Contact : Jean Muckensturm - 0033 6 13 07 25 43 - jean@osmosiscie.com

! Between speakers in height and speakers on the ground + 6 dB of difference (HP height > HP ground).
With amplifiers and process: To draw wiring HP/SUB (left stereo) and Modulates return (left drank or aux/monitor)

CONTROL 1 reader CD

Speaker/SUB Return Ali 1 counts of mixing 6 in/4 out

1 equalisation face and standard return BSS FCS 966 or DBX 3231L

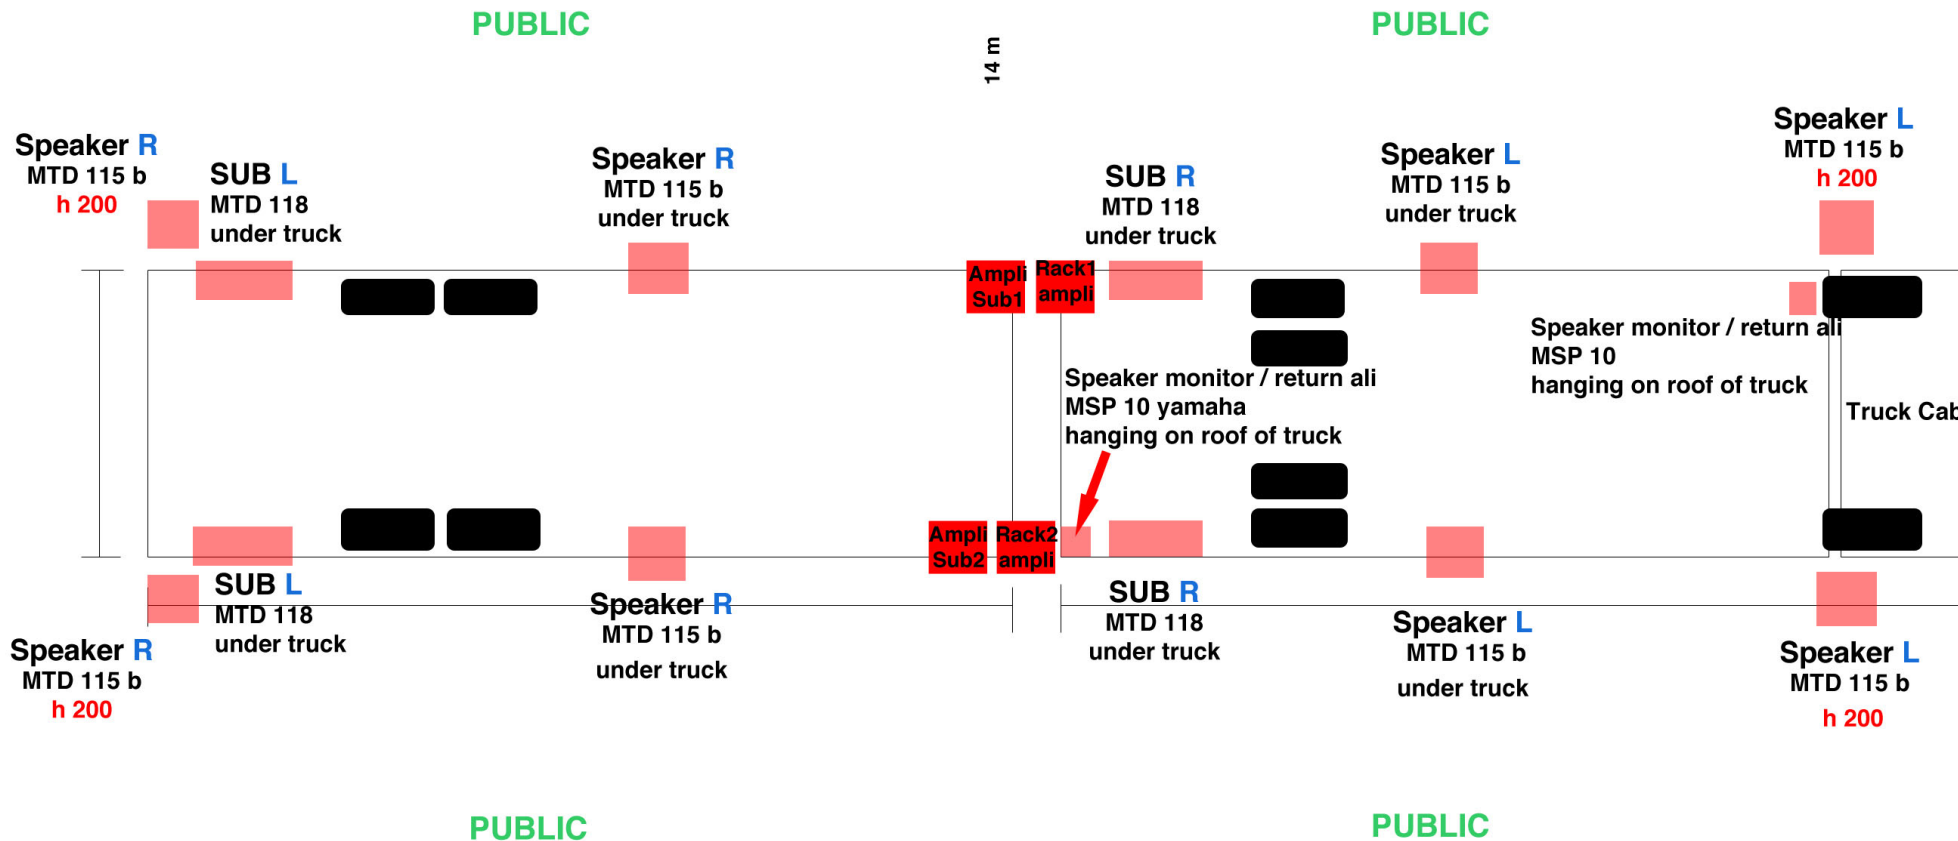

LIGHT power max approximately 17Kw

> Lighting already established in carrying vehicle/space dances/carrying Renault

4 slopes of 6 fluos (24 tubes 36w)	1 circuit 865w
6 halogens 150w	2 circuits of 450w
6 dichroic BT 50w	3 circuits of 100w
2 dichroic BT 50w	1 circuit 100w

> Lighting already established in trailer/video space/Samro trailer

5 port-holes 40w	1 circuit 200w
4 halogens 150w	1 circuit 600w

> Lighting already established on pillars of video projection

6 lamps mercury with discharge 200w	1 circuit 1200w
-------------------------------------	-----------------

> Material to provide us and establish

- 2 profiles type 614 with knives 1000w
- + 2 feet with toothed rack for profiles H mini 5m
- 20xQuartz 500w with hooks to hang under the truck
- 12 extensions of 25m - 12 extensions of 10m - 25 extensions of 3m - 25 doublettes - 10 triplettes
- 1 turn scaffolding for profiles, cover truck and trailer...
- 1 lifting truck *standard Fennwick, Manitoban* to charge and discharge the supports concrete (1 T 500) from the carrier and to place them on site, assembly of the video pillars.
- Passage of cables of the control towards truck 3 x 14m

SOUND

> Material to provide us and establish

Diffusion

8 HP type MTD 115b (L-Acoustics) + analogiques controllers LLC 115b st + amplifiers CAMCO Tecton 24.4
4 SUB type MTD 118 or equivalent + associated processors (LLC 115) + amplifiers CAMCO DX 24
2 HP Monitor type Yamaha MSP 10 (60 W HF minimum)

VIDEO

> Material provided by the company

2 vidéos projectors EIKI LC - X50M power 300w
2 camescopes mini DV Sony + 2 mini cameras webcam type
1 table video mixing Edirol
Wiring BNC
6 projection screens white PVC - fireproofed DIN standard 4102 B1 - 4 X (243 X 303) - 2 X (286 X 303)

PLANNING

J -2 **Road**
In function distance

J -1 **Personal Asked : 1 manager sound (installation) - 1 manager light (installation) - 2 general-purpose technicians**

3 services from 4 hours

8h - 12h	14h - 17h	Installation of the vehicle Unloading blocks supports concrete and installation on site Unloading metal pillars and the material Assembly pillars on blocks supports Assembly of the plates of video-projection Installation of the 6 screens on frame in trailer governed Installation sound Installation light Installation video-projectors Installation Cleaning space
18h - 19h		Sound Check

extinction street lighting

Adjustments of the 2 video-projectors
Adjustments light
Control Connections
Arrangement video-projectors, closing covers, put in safety of the site

guarding

J 0 **Personal Asked :1 manager sound (disassembling) - 1 manager light (disassembling) - 2 general-purpose technicians**

2 services from 4h

17h - 18h	Training with technicians (tests uncovering truck)
From 20h	Installation video-projectors Uncovering tows Check sound and light

extinction street lighting

Adjustments video-projectors

REPRESENTATION - 1h Beginning show 3 people for carrying uncovering in live

End of representation Disassembling, arrangement, cover trailer and carrier Put in safety of the site

guarding

J +1 **Road**